

AIP
HONDURAS


AD-2.MHLM IAC ILS Y RWY22
07 OCT 21

INSTRUMENT
APPROACH
CHART

AERODROME ELEV 92 ft
HEIGHTS RELATED TO
THR RWY 22 - ELEV 84 ft


APP 119.7 TWR 118.2
GND 121.9 ATIS 132.2

**SAN PEDRO SULA /
RAMON VILLEDA MORALES INTL**
ILS or LOC Y RWY 22

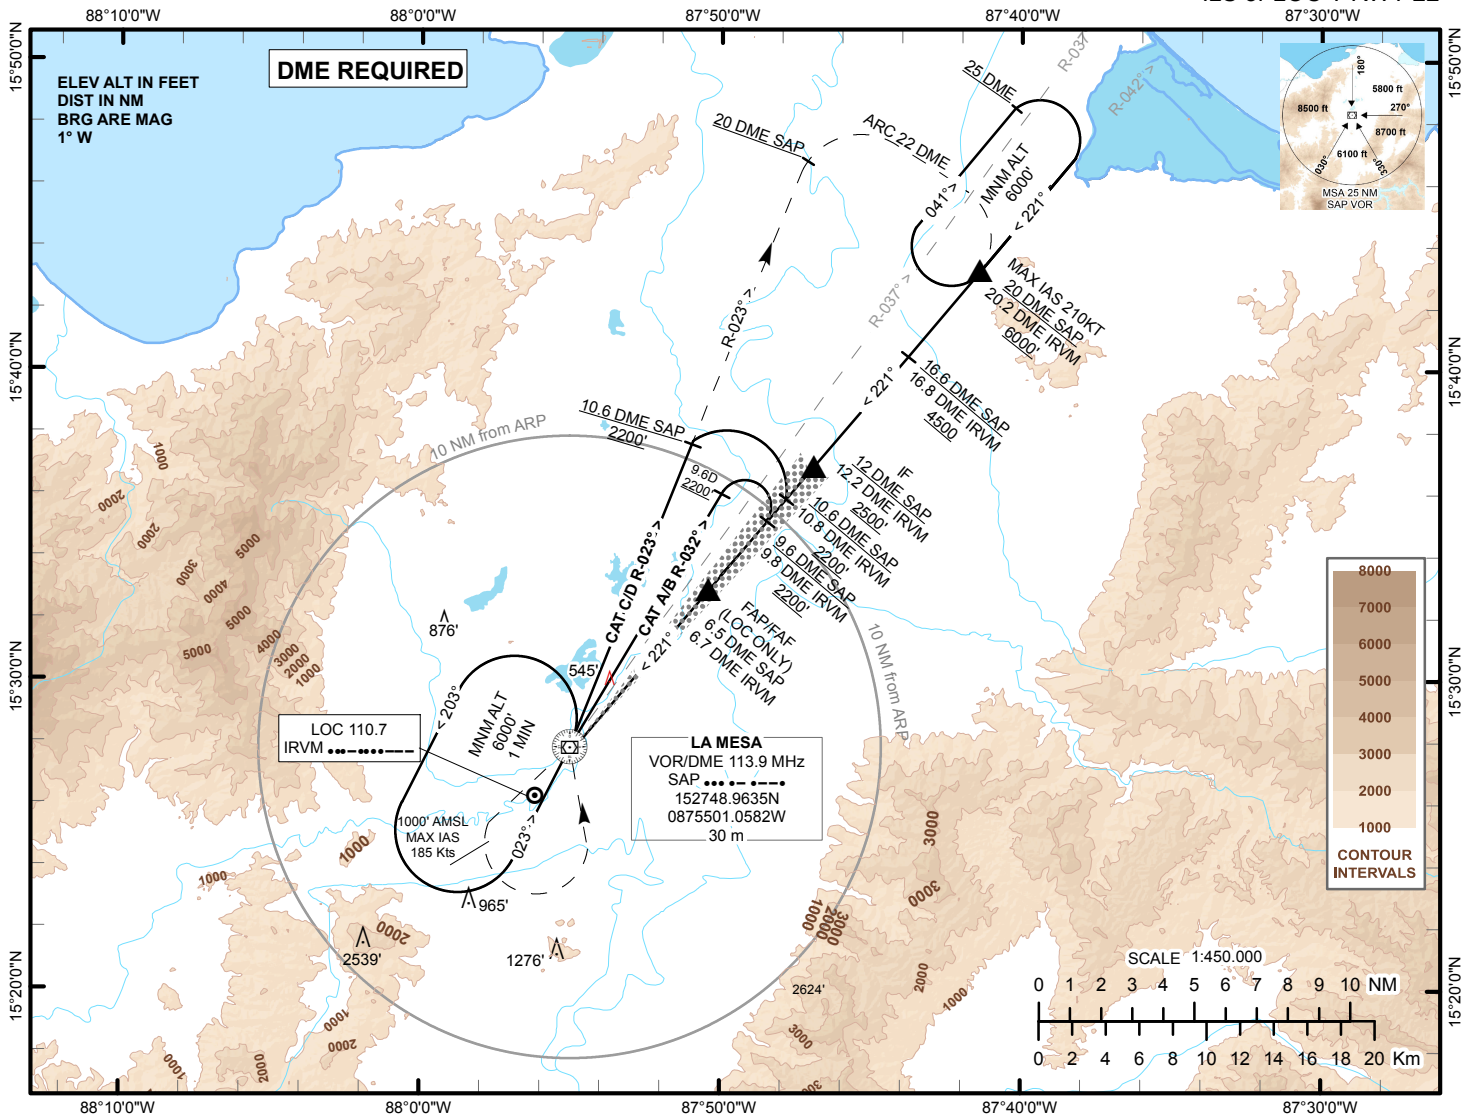

TRANSITION ALT: 19 000'

MISSED APCH: MAX IAS 185KT until VOR SAP
Climb on R-220 until reaching 1000FT AMSL,
turn LEFT to SAP VOR climbing to +2000ft AMSL
climb on R-023 to 20DME turn right on 22 DME
ARC to holding 20nm fm SAP. Request
ATC instructions.

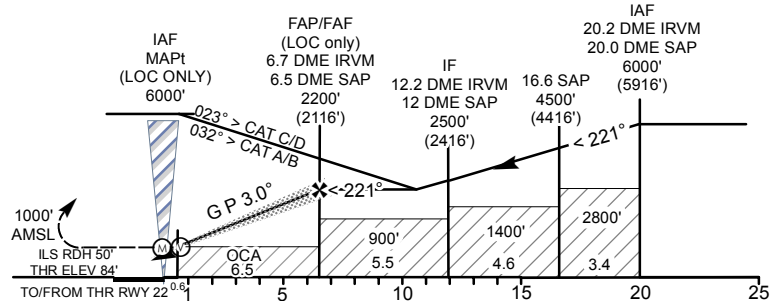

Rate of descent	GS (VELOCITY)	70	90	100	120	140	160	CIRCLE TO LAND NOT AUTHORIZED AT NIGHT RWY04		
	Ft/min GS 3,0°	372	478	531	637	743	849			
FAF - Mapt 6.5 NM	min	05:34	04:20	03:54	03:15	02:47	02:26			
straight in approach	ILS DA (H) 333' (249')			LOC (GS OUT) OCA (H) 500' (416')				MAX Kts	CIRCLE TO LAND	
CAT	Ceiling - Visibility								OCA (H)	Ceiling - Visibility
A	250' - ¾ (1200m)			500' - 1 (1600m)				100	730' (638')	500' - 1 (1600M)
B								135	1100' (1008')	
C								180	1520' (1428')	
D				500' - 1 1/4 (2000m)				205	1770' (1678')	500' - 2½ (3600M)

AERO INFO DATE
5 NOV 20

AIM - HONDURAS

AIRAC AMDT 13/21